



PowerLUX- 9W

Reflector+Lens

Technical Parameters:

Name	PowerLUX10 TTW
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	250mA (36V)
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Dimmability:	Tunable white
Weight:	0.10KG/pc 11.8KG/CTN 100pcs/CTN 580x310x220mm




Ordering Information:

● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
9 W	>95	 15°	564 lm	1800K	●	LUX-30615-M10CT
			875 lm	4000K	●	LUX-30615-M10CT
		 40°	592 lm	1800K	●	LUX-30640-M40CT
			948 lm	4000K	●	LUX-30640-M10CT
		 60°	568 lm	1800K	●	LUX-30660-M10CT
			932 lm	4000K	●	LUX-30660-M10CT

Technical Data test pattern


CRI95 15°




1800K

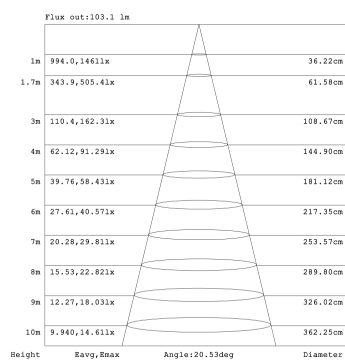


4000K

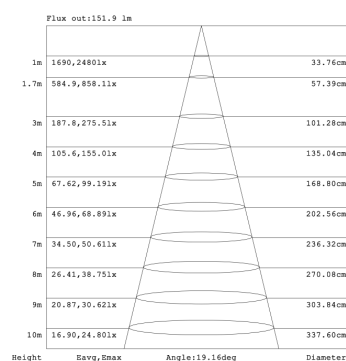


CRI95 40°




1800K




4000K




CRI95 60°




1800K

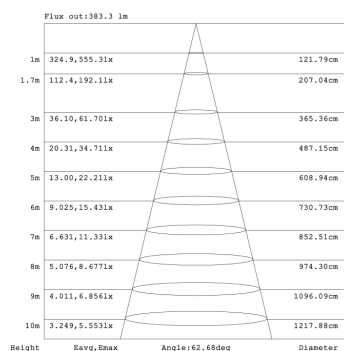

4000K

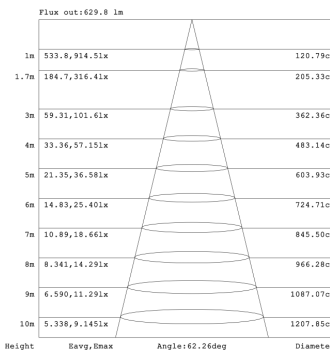

Installation instruction

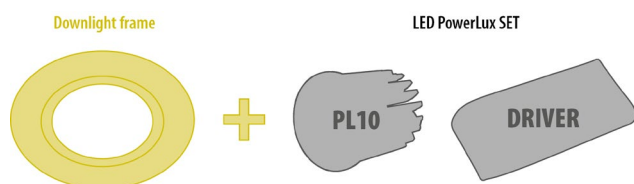

Packaging:



Box

L52*W52*H76mm

1pc/box

GW: 0.1kg/box



Middle box

L282*W111*H82mm

10pc/box

GW: 1.05kg/box

Outer carton

L580*W310*H200mm

100pcs/CTN

GW: 11.96kg/carton

